

中策橡胶

ZHONGCE RUBBER GROUP CO., LTD.



zc-rubber.com



facebook.com/zcrubber



twitter.com/zc_rubber




linkedin.com/company/zcrubber

OFF THE ROAD & INDUSTRIAL

2021 TYRE CATALOGUE

OFF THE ROAD & INDUSTRIAL

2021 TYRE CATALOGUE

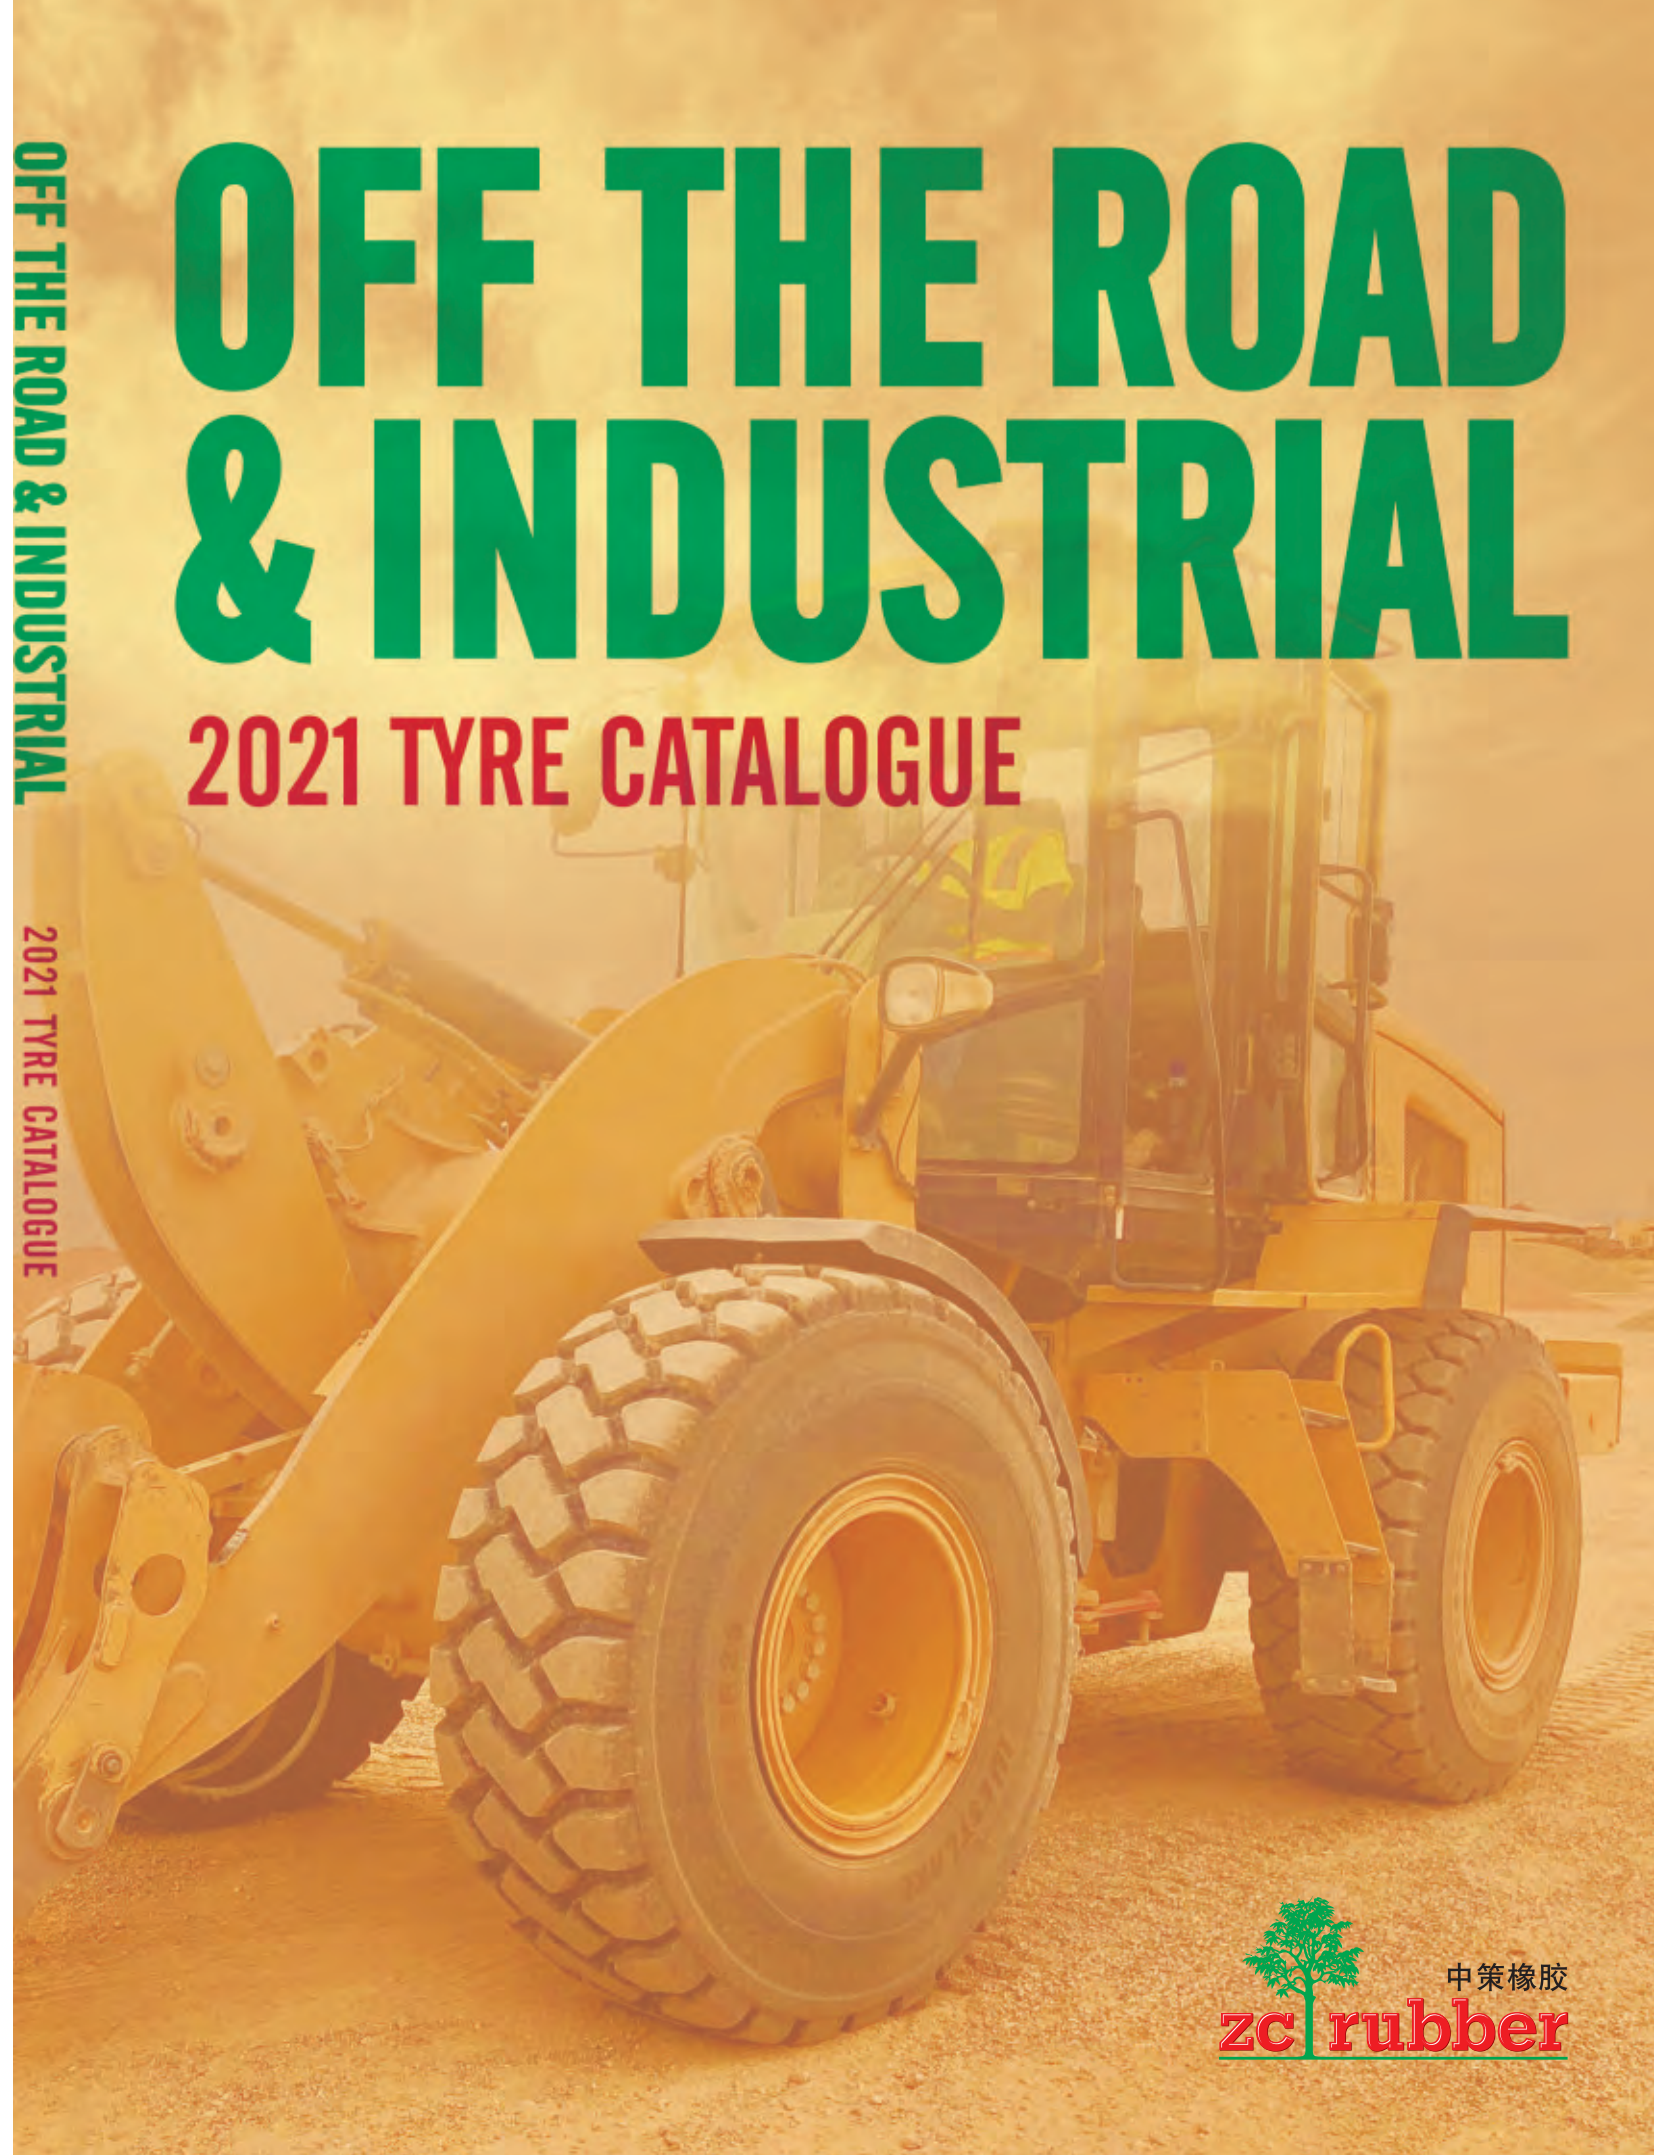

中策橡胶


- A Company Established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2020
- Sale Revenue Reached USD3.585 Billion in Year 2019

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities. Meanwhile the quality control system approved by global tyre manufacturers and

international vehicle manufacturers will guarantee the safety and quality of ZC-Rubber tyres.

Today ZC-Rubber is expanding from a Chinese oriented company to a global tyre manufacturer. The subsidiaries located in Southeast Asia, North America, South America and Europe are serving customers without any difference of time and language. The newly established Thailand plant will produce suitable products for local and nearby markets. Safe and value will be the key supplied by ZC-Rubber, who will craft a better future together with partners and friends all over the world.

Manufacturing Bases				
	PCR & LTR Plant in Xiasha	TBR Plant in Xiasha	Rubber Products Plant in Yonggu	Bias Tyre Plant in Xinjiang
Advanced Production Facility				
	Extruding Machine	Germany Fischer Cutting Machine	Germany Krupp Building Machine	Hydraulic Tyre Curing Machine Press
Strict Quality Inspection				
	ASTEC Tyre Uniform Testing Machine	Y.MITS Tyre X-ray Inspection Machine	Manual Inspection	Manual Inspection
R&D Center				
	VMI Tread Waring Test	Noise Analysis Laboratory	Flat-Trac Test System	Bead Unseating Test



OFF-THE-ROAD TYRES-BIAS



Tubeless design for tough logging application
 Higher ply to meet the heavier load and higher-power machines
 Unique cut resistance compound for off road application

LS25

Special Machines/Logger

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
23.1-26	LS-2	16	DW20A	55	1560	587	4450	240	TL
30.5L-32	LS-2	26	DW27	55	1847	775	7100	280	TL



OFF-THE-ROAD TYRES-BIAS Skid Steer



EL77

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	L-5	10	8.25	31	773	264	2135	520	TL
	L-5	12	8.25	40	773	264	2375	620	TL
12-16.5	L-5	12	9.75	35	831	307	2865	550	TL
	L-5	14	9.75	40	831	307	3075	620	TL



CL718

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	-	8	8.25	15.0	773	264	1880	410	TL
12-16.5	-	10	9.75	18.0	831	307	2540	450	TL



CL719

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	-	8	8.25	15.0	773	264	1880	410	TL
	-	10	8.25	15.0	773	264	2135	520	TL
12-16.5	-	10	9.75	18.0	831	307	2540	450	TL
	-	12	9.75	18.0	831	307	2865	550	TL



CL720

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	-	12	8.25	25.0	773	264	2375	620	TL



CL721

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
12-16.5	-	14	9.75	35.0	931	307	3075	620	TL

OFF-THE-ROAD TYRES-BIAS



CL723

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	-	10	8.25	22.0	773	264	2135	520	TL
12-16.5	-	12	9.75	24.0	831	307	2865	550	TL
14-17.5	-	14	10.50	22.0	921	349	3875	550	TL



K192

Skid Steer

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TI/TL
10-16.5	-	8	8.25	19.5	773	264	1880	410	TL
10-16.5	-	10	8.25	19.5	773	264	2135	520	TL
12-16.5	-	10	9.75	22.0	831	307	2540	450	TL



OFF-THE-ROAD TYRES-BIAS Port Service



CL629

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
12.00-24	IND-4	24	8.5	35.0	1245	315	12420	10005	9315	8625	1000	TT
	IND-4	24	10.0	50.0	1370	375	17000	13800	12800	11500	1000	TT/TL
14.00-24	IND-4	28	10.0	50.0	1370	375	18000	14500	13500	12000	1000	TT/TL
	IND-4	32	10.0	50.0	1370	375	18450	14850	13850	12800	1000	TT/TL
16.00-25	IND-4	32	11.25/2.0	50.0	1495	430	22500	18100	16900	15600	1050	TT/TL
	IND-4	36	11.25/2.0	50.0	1495	430	24500	19700	18400	17000	1170	TT/TL
18.00-25	IND-4	40	13.00/2.5	55.0	1675	515	31500	25400	23600	21900	1000	TT/TL
18.00-33	IND-4	40	13.00/2.5	70.0	1875	500	38200	30700	28600	26500	1000	TL



CL629A

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
12.00-24	IND-4	24	8.5	40	1245	315	12300	10800	9300	7100	1000	TT



CL629K

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
18.00-25	IND-4	40	13.00/2.5	70.0	1675	515	31500	25400	23600	21900	1000	TL



SM05

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
18.00-25	IND-4	40	13.00/2.5	90.0	1675	515	31500	25400	23600	21900	1000	TL



SM04

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
18.00-25	IND-4	40	13.00/2.5	60	1675	515	31500	25400	23600	21900	1000	TL

OFF-THE-ROAD TYRES-BIAS

OFF-THE-ROAD TYRES-BIAS



EL27

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
16.00-25	IND-3	32	11.25/2.0	32.0	1495	430	22500	18100	16900	15600	1000	TL
	IND-3	36	11.25/2.0	32.0	1495	430	24500	19700	18400	17000	1000	TL
18.00-25	IND-3	40	13.00/2.5	36.0	1610	510	30600	24600	23000	21200	1000	TL
	IND-3	44	13.00/2.5	36.0	1610	510	32700	26300	24500	22700	1000	TL
	IND-3	48	13.00/2.5	36.0	1610	510	36000	29000	27000	25000	1000	TL
21.00-25	IND-3	40	15.00/3.0	36.0	1750	575	36400	29300	27300	/	1000	TL
	IND-3	44	15.00/3.0	36.0	1750	575	38900	31100	29200	/	1000	TL
21.00-35	IND-3	40	15.00/3.0	38.0	2005	570	43700	35200	32800	30400	1000	TL



EL29

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
14.00-24	IND-3	28	10	30.0	1370	375	18000	14500	13500	12000	1000	TT/TL
	IND-3	32	10	30.0	1370	375	18450	14850	13850	12800	1000	TL



EL39

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
11.00-20	E-3	16	8.0	28.0	1105	293	5165	800	TT
	E-3	18	8.0	28.0	1105	293	5535	900	TT
12.00-20	E-3	18	8.5	28.0	1145	315	5915	800	TT
	E-3	20	8.5	28.0	1145	315	6335	900	TT



EL57

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Load Capacity at various speed (kg)				Cold Inflation Pressure (kPa)	TT/TL
							0km/h	5km/h	10km/h	25km/h		
12.00-24	IND-4	24	8.5	43.5	1245	315	12300	10800	9300	7100	1000	TT



CL991

Port Service

Size	TRA Code	Ply Rating	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
11.00-20	-	18	8.0	30	1105	293	3650	840	TT
12.00-20	-	20	8.5	30	1145	315	4000	880	TT



OFF-THE-ROAD TYRES-BIAS

OFF-THE-ROAD TYRES-BIAS Industrial Service-Forklift



GA69

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
5.00-8(B)	-	10	-	3.50D	11.0	470	137	1150	1000	TT
18x7-8(B)	-	14/16	-	4.00E	13.0	4650	173	1505	970	TT
6.00-9(B)	-	10/12	-	5.00S	13.0	540	160	1505	860	TL
7.00-9(B)	-	10	-	5.00S	13.0	590	190	1995	860	TT
650-10(B)	-	10	-	5.00F	14.0	590	175	1655	790	TT
7.00-12(B)	-	12/14	-	6.5	17	676	190	2375/2590	860/1000	TT
8.25-12(B)	-	12	-	6.5	16.5	765	235	3060	720	TT
8.25-15(B)	-	14/16	-	4.33R	19.0	840	235	3775/4050	830/925	TT
250-15(B)	-	16/18+	-	7.5	23.5	735	250	3865/4110	930/1030	TT
300-15(B)	-	20	-	8.0	23.0	840	300	5940	930	TT
28x9-15(B)	-	14	-	7.0	16	710	220	3050	970	TT



CL618

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
4.00-8	-	6	-	3.00D	7.0	415	112	640	720	TT
7.00-9	-	10	-	5.00S	10.0	590	190	1995	860	TT
8.25-12	-	12	-	5.00S	13.0	728	210	2000	700	TT

OFF-THE-ROAD TYRES-BIAS

OFF-THE-ROAD TYRES-BIAS



CL619

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
5.00-8	-	10	-	3.50D	12.0	470	137	1150	1000	TT
6.00-9	-	8	-	4.00E	13.0	540	160	1315	690	TT
6.50-10	-	10	-	4.00E	13.0	540	160	1505	860	TT
7.00-12	-	12	-	5.00S	15.0	676	190	2375	860	TT
7.00-15	-	12	-	5.5	15.0	750	200	2870	860	TT
7.50-15	-	12	-	6.0	17.0	780	215	3075	790	TT
8.25-15	-	14	-	6.5	16.0	840	235	3775	830	TT
8.25-15	-	16	-	6.5	16.0	840	235	4330	900	TT
18x7-8	-	16	-	4.33R	14.0	173	465	1640	1000	TT
21x8-9	-	14	-	6.00E	15.5	535	200	2040	1000	TT
23x9-10	-	18	-	6.50F	16.0	595	225	3160	1050	TT
28x9-15	-	14	-	7.0	13.0	710	220	3050	970	TT
28x9-15	-	16	-	7.0	13.0	710	220	3115	1000	TT
250-15	-	16	-	7.5	21.5	735	250	3865	930	TT
300-15	-	18	-	8.0	22.0	840	300	5530	830	TT
300-15	-	20	-	8.0	22.0	840	300	5940	930	TT



CL621

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
5.00-8	-	10	-	3.50D	11.0	470	137	1150	1000	TT
6.00-9	-	10	-	4.00E	12.5	540	160	1505	860	TT
7.00-9	-	10	-	5.00S	10.0	590	190	1995	860	TT
6.50-10	-	10	-	5.00F	12.0	590	175	1655	790	TT
7.00-12	-	12	-	5.00S	13.0	676	190	2375	860	TT
8.25-12	-	12	-	6.5	19.0	765	235	3060	720	TT
6.00-15	-	10+	-	4.50E	14.0	705	170	2185	830	TT
8.25-15	-	14	-	6.5	16.0	840	235	3775	830	TT
9.00-16	-	14	-	6.50H	16.0	890	255	4495	760	TT
8.25-20	-	14	-	6.5	15.0	974	235	3865	830	TT
9.00-20	-	16	-	7.0	17	1018	259	4715	860	TT
18x7-8	-	14	-	4.33R	16.0	173	465	1440	900	TT
23x9-10	-	18	-	6.50F	14.0	595	225	3160	1050	TT
27x10-12	-	14	-	8.00G	14.0	690	255	3210	720	TT
28x9-15	-	14	-	7.0	16.0	710	220	3050	970	TT
250-15	-	16	-	7.5	21.0	735	250	3865	930	TT
300-15	-	18+	-	8.0	23.0	840	300	5530	830	TT



CL622

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
10.00-20	-	16	-	7.5	22.0	1073	278	-	800	TT
12.00-20	-	16	-	8.5	25.0	1145	315	-	700	TT
12.00-20	-	18	-	8.5	25.0	1145	315	-	700	TT



CL628

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
6.00-9(B)	-	10	-	4.00E	13.0	540	160	1505	860	TT
6.50-10(B)	-	10	-	5.00F	15.0	590	175	1655	790	TT
7.00-12(B)	-	12	-	5.00S	17.0	676	190	2375	860	TT
8.25-12(B)	-	12	-	6.5	16.5	765	235	3060	720	TT
8.25-15(B)	-	14	-	6.5	15.5	840	235	3775	830	TT
28x9-15(B)	-	14	-	7.0	16.0	710	220	3050	970	TT
300-15(B)	-	18+	-	8.0	23.0	840	300	5530	830	TT

OFF-THE-ROAD TYRES-BIAS



CL623

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
9.00-16	-	14	-	6.50H	15.0	890	255	4495	760	TT



CL626

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
10.00-20	-	18	-	7.5	26.5	1099	278	6755	910	TT
12.00-20	-	20	-	8.5	26.5	1173	315	8055	880	TT



EDT

Industrial Service-Forklift

Size	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inflation Pressure (kPa)	TT/TL
5.00-8	-	10	-	3.50D	17.5	470	137	1150	1000	TT
6.00-9	-	12	-	4.00E	19.3	540	160	1675	1030	TT
6.50-10	-	12	-	5.00F	23.8	590	175	1860	790	TT
7.00-12	-	14	-	5.00S	22.0	676	190	2590	1000	TT
7.00-15	-	14	-	5.5	23.0	750	200	3140	1000	TT
7.50-15	-	14	-	6.0	21.5	780	215	3375	925	TT
8.25-15	-	14	-	6.5	24.5	840	235	3775	830	TT
28x9-15	-	14	-	7.0	20.6	710	220	3050	970	TT



OFF-THE-ROAD TYRES-SOLID Resilent

OFF-THE-ROAD TYRES-SOLID

OFF-THE-ROAD TYRES-SOLID



CL408

Resilent

Size	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)										Tire Weight (kg)
					6mph/10km/h		10mph/16km/h		15mph/25km/h		Other Vehicles				
					Load	Steer	Load	Steer	Load	Steer	0mph/0mph	4mph/6km/h	6mph/10km/h	15mph/25km/h	
6.50-10	26.0	5.00F	575	160	2715	2090	2485	1910	2310	1775	2840	2310	2095	1775	33.5
7.00-15	35.0	5.5	730	196	3700	2845	3375	2595	3135	2410	3855	3135	2845	2410	57
	35.0	6.0	730	196	4035	3105	3680	2830	3420	2630	4205	3420	3105	2630	58
28x9-15	30.0	7.0	700	216	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	60.3
8.15-15	30.0	7.0	700	216	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	60.3
225/75-15	30.0	7.0	700	216	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	60.3



GHT01(S)

Resilent

Size	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)										Tire Weight (kg)
					6mph/10km/h		10mph/16km/h		15mph/25km/h		Other Vehicles				
					Load	Steer	Load	Steer	Load	Steer	0mph/0mph	4mph/6km/h	6mph/10km/h	15mph/25km/h	
3.50-5	13	3.00	298	102	760	610	735	550	685	515	770	670	605	515	6.0
5.00-8	18	3.00D	450	130	1255	965	1145	880	1060	815	1305	1060	960	815	17.0
	18	3.50D	450	130	1465	1125	1335	1025	1235	950	1520	1235	1120	950	17.0
16x6-8(150/75-8)	15	4.33R	412	152	1545	1190	1410	1085	1305	1005	1610	1305	1185	1005	16.0
18x7-8(180/70-8)	18	4.33R	456	162	2430	1870	2215	1705	2060	1585	2535	2060	1870	1585	22.0
6.00-9	18	4.00E	525	150	1975	1520	1805	1390	1675	1290	2065	1675	1520	1290	26.8
7.00-9	20	5.00S	550	168	2670	2055	2440	1875	2260	1740	2785	2260	2055	1740	34.0
21x8-9(200/75-9)	18	6.00E	518	182	2890	2225	2645	2035	2455	1890	3025	2455	2230	1890	34.4
6.50-10	18	5.00F	570	160	2715	2090	2485	1910	2310	1775	2840	2310	2095	1775	34.5
23x9-10(225/75-10)	25	6.50F	580	210	3730	2870	3405	2620	3160	2430	3890	3160	2865	2430	46.6
7.00-12	18	5.00S	654	170	3105	2390	2835	2180	2635	2025	3240	2635	2390	2025	46.5
8.25-12	25	5.00S	720	190	3425	2635	3125	2405	2905	2235	3575	2905	2635	2235	65.0
5.50-15	22	4.50E	672	150	2525	1870	2415	1790	2195	1625	2435	2110	1715	1625	38.8
6.00-15	22	4.50E	710	164	2830	2095	2705	2000	2455	1820	2730	2365	2145	1820	48.2
7.00-15	25	5.50	736	194	3700	2845	3375	2595	3135	2410	3855	3135	2845	2410	64.5
	25	6.00	736	194	4035	3105	3680	2830	3420	2630	4205	3420	3105	2630	65.0
8.25-15	25	5.50	820	212	4305	3310	3925	3020	3640	2800	4480	3640	3305	2800	92.0
	25	6.50	820	212	5085	3910	4640	3570	4310	3315	5304	4310	3910	3315	92.6
28x9-15(225/75-15)	20	6.50	700	215	3770	2900	3445	2650	3200	2460	3935	3200	2900	2460	63.0
	20	7.00	700	215	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	63.6
300-15(315/70-15)	25	8.00	813	256	6895	5305	6300	4845	5850	4500	7200	5850	5310	4500	108.4
	30	6.50	960	220	5165	4305	4715	3930	4380	3650	5475	4745	3980	3650	123.0
8.25-20	30	7.00	960	220	5335	4445	4870	4060	4525	3770	5655	4900	4110	3770	123.8
	30	6.50	1010	235	6160	5135	5630	4690	5225	4355	6535	5660	4745	4355	147.5
9.00-20	30	7.00	1010	235	6365	5305	5815	4845	5400	4500	6750	5850	4905	4500	148.2



GHT01H

Resilent

Size	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)										Tire Weight (kg)
					6mph/10km/h		10mph/16km/h		15mph/25km/h		Other Vehicles				
					Load	Steer	Load	Steer	Load	Steer	0mph/0mph	4mph/6km/h	6mph/10km/h	15mph/25km/h	
6.00-9	18	4.00E	525	150	1975	1520	1805	1390	1675	1290	2065	1675	1520	1290	25.0
6.50-10	18	5.00F	570	160	2715	2090	2485	1910	2310	1775	2840	2310	2095	1775	33.0
7.00-12	18	5.00S	654	170	3105	2390	2835	2180	2635	2025	3240	2635	2390	2025	45.0
250-15(250/70-15)	20	7.00	720	236	5220	4015	4770	3670	4425	3405	5450	4425	4015	3405	73.0
	20	7.50	720	236	5595	4305	5110	3930	4745	3650	5840	4745	4305	3650	73.5
300-15(315/70-15)	25	8.00	815	264	6895	5305	6300	4845	5850	4500	7200	5850	5310	4500	115.0
	25	5.50	736	194	3700	2845	3375	2595	3135	2410	3855	3135	2845	2410	61.0
7.00-15	25	6.00	736	194	4035	3105	3680	2830	3420	2630	4205	3420	3105	2630	61.6
	25	5.50	820	212	4305	3310	3925	3020	3640	2800	4480	3640	3305	2800	89.0
8.25-15	25	6.50	820	212	5085	3910	4640	3570	4310	3315	5304	4310	3910	3315	89.0
	20	6.50	700	215	3770	2900	3445	2650	3200	2460	3935	3200	2900	2460	60.7
28x9-15	20	7.00	700	215	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	61.0

OFF-THE-ROAD TYRES-SOLID



SR60

Resilent

Size	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)								Tire Weight (kg)		
					6mph/10km/h		10mph/16km/h		15mph/25km/h		Other Vehicles				
					Load	Steer	Load	Steer	Load	Steer	0mph/0mph	4mph/6km/h		6mph/10km/h	15mph/25km/h
5.00-8	15	3.00D	450	123	1255	965	1145	880	1060	815	1350	1060	960	815	16.6
6.00-9	18	4.00E	525	146	1975	1520	1805	1390	1675	1290	2065	1675	1520	1290	26.5
6.50-10	20	5.00F	575	156	2715	2090	2485	1910	2310	1775	2840	2310	2095	1775	34.2
7.00-12	20	5.00S	654	169	3105	2390	2835	2180	2635	2025	3240	2635	2390	2025	44.5
15x41/2-8(125/75-8)	12	3.00D	380	105	1005	775	915	705	850	655	1050	850	775	655	8.8
16x6-8(150/75-8)	15	4.33R	418	150	1545	1190	1410	1085	1305	1005	1610	1305	1185	1005	16.0
18x7-8(180/70-8)	15	4.33R	454	165	2430	1870	2215	1705	2060	1585	2535	2060	1870	1585	20.9
21x8-9(200/75-9)	18	6.00E	518	182	2890	2225	2645	2035	2455	1890	3025	2455	2230	1890	30.1
200/50-10	16	6.50F	457	190	2910	2240	2665	2050	2470	1900	3040	2470	2240	1900	23.7
23x9-10(225/75-10)	20	6.50F	580	190	3730	2870	3405	2620	3160	2430	3890	3160	2865	2430	43.2
23x10-12(250/60-12)	20	8.00G	585	238	4450	3425	4060	3125	3770	2900	4640	3770	3420	2900	50.5
28x9-15(225/75-15)	25	7.0	694	210	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	58.9
28x12.5-15	25	9.75	694	300	6200	4770	5660	4355	5260	4045	6470	5260	4775	4045	85.0



SR61

Resilent

Size	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)								Tire Weight (kg)		
					6mph/10km/h		10mph/16km/h		15mph/25km/h		Other Vehicles				
					Load	Steer	Load	Steer	Load	Steer	0mph/0mph	4mph/6km/h		6mph/10km/h	15mph/25km/h
5.00-8	22.0	3.00D	454	123	1255	956	1145	880	1060	815	1305	1060	960	815	16.6
6.00-9	25.5	4.00E	525	141	1975	1520	1805	1390	1675	1290	2065	1675	1520	1290	26.5
6.50-10	26.0	5.00F	575	156	2715	2090	2485	1910	2310	1775	2840	2310	2095	1775	34.2
7.00-12	27.5	5.00S	654	169	3105	2390	2835	2180	2635	2025	3240	2635	2390	2025	44.5
8.25-15	32.0	6.50	818	200	5085	3910	4640	3570	4310	3315	5304	4310	3910	3315	86.5
10.00-20	42.0	7.0	1002	250	6845	5705	6260	5215	5815	4845	7270	5815	5280	4845	150.6
10.00-20	42.0	7.5	1002	250	7075	5895	6460	5385	6000	5000	7500	6500	5450	5000	150.6
12.00-20	47.0	8.0	1081	265	8640	7200	7885	6570	7320	6100	9150	7930	6650	6100	197.6
12.00-20	47.0	8.5	1081	265	8920	7435	8140	6785	7560	6300	9450	8190	6865	6300	197.6
14.00-24	45.0	10.00	1346	342	12165	10135	11105	9255	10315	8595	12890	10175	9370	8595	410.9
14.00-25	45.0	11.25	1333	381	13210	11010	12060	10050	11200	9335	14000	11200	10175	9335	430.0
18x7-8(180/70-8)	18.0	4.33R	455	152	2430	1870	2215	1705	2060	1585	2535	2060	1870	1585	20.9
28x9-15(225/75-15)	25.0	7.00	694	210	4060	3125	3710	2855	3445	2650	4240	3445	3125	2650	58.9
300-15(315/70-15)	34.0	8.00	814	242	6895	5305	6300	4845	5850	4500	7200	5850	5310	4500	106.6



OFF-THE-ROAD TYRES-SOLID
Press On

OFF-THE-ROAD TYRES-SOLID

OFF-THE-ROAD TYRES-SOLID



SM/TR

Press On

Size	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)					Weight (kg)	
			6mph/10km/h		10mph/16km/h		Other Vehicles 10mph/16km/h	SM	TR
			Load	Steer	Load	Steer			
9x5x5	229	127	890	790	785	715	685	6.2	-
10x4 3/4x6 1/2	254	121	885	790	785	710	680	6.7	-
10x5x6 1/2	254	127	940	835	830	755	725	7.0	6.9
10 1/2x5x6 1/2	267	127	1000	890	885	805	770	7.8	-
12x4x8	305	102	835	745	740	670	645	7.4	-
12x4 1/2x8	305	114	970	865	860	780	745	8.4	-
12x5 1/2x8	305	140	1240	1100	1095	995	950	10.3	-
13 1/2x5 1/2x8	343	140	1400	1245	1235	1125	1075	13.4	12.3
14x4 1/2x8	356	114	1085	965	960	870	835	11.2	10.7
14x5x10	356	127	1240	1100	1095	995	955	11.5	-
15x4x11 1/4	381	102	985	875	870	790	755	10.2	-
15x5x11 1/4	381	127	1290	1150	1145	1040	995	12.1	-
16x5x10 1/2	406	127	1400	1245	1240	1125	1075	14.5	14.3
16x6x10 1/2	406	152	1775	1580	1570	1430	1365	17.6	17.1
16x7x10 1/2	406	178	2155	1915	1905	1730	1655	20.8	-
16 1/4x5x11 1/4	413	127	1415	1260	1250	1135	1090	14.5	14.1
16 1/4x6x11 1/4	413	152	1780	1585	1575	1430	1370	17.5	16.9
16 1/4x7x11 1/4	413	178	2150	1915	1900	1730	1655	20.8	20.0
17x5x12 1/8	432	127	1460	1300	1295	1175	1125	15.3	-
18x5x12 1/8	457	127	1525	1355	1350	1225	1175	17.5	16.8
18x6x12 1/8	457	152	1945	1735	1720	1565	1500	21.2	20.3
18x7x12 1/8	457	178	2370	2110	2095	1905	1820	24.4	23.9
18x8x12 1/8	457	203	2790	2485	2470	2245	2145	28.3	26.9
18x9x12 1/8	457	229	3215	2860	2840	2580	2470	-	34.0
21x6x15	533	152	2185	1945	1935	1760	1680	25.7	25.3
21x7x15	533	178	2665	2370	2355	2140	2050	30.0	29.3
21x8x15	533	203	3140	2795	2780	2525	2415	34.5	33.0
21x9x15	533	229	3620	3220	3200	2910	2785	39.4	-
20x5x16	508	127	1620	1440	1430	1300	1245	17.9	-
20x8x16	508	203	2795	2490	2475	2250	2150	28.8	27.6
22x8x16	559	203	3255	2895	2880	2615	2500	36.8	35.0
22x9x16	559	229	3745	3335	3315	3010	2880	45.1	42.9
22x10x16	559	254	4240	3775	3750	3410	3265	51.0	-
22x12x16	559	305	5230	4655	4625	4205	4025	61.3	60.3
22x14x16	559	356	6220	5535	5500	5000	4785	73.0	-
22x16x16	559	406	7205	6415	6375	5795	5545	83.0	-
28x12x22	711	305	6265	5575	5545	5035	4820	81.4	-
660x203x480	660	203	3740	3330	3310	3010	2880	54.5	-



SM/TR

Press On

Size	Overall Diameter (mm)	Section Width (mm)	Max. Load (kg)					Weight (kg)	
			6mph/10km/h		10mph/16km/h		Other Vehicles 10mph/16km/h	SM	TR
			Load	Steer	Load	Steer			
9x5x5	229	127	890	790	785	715	685	6.4	-
10x4 3/4x6 1/2	254	121	885	790	785	710	680	7.0	-
10x5x6 1/2	254	127	940	835	830	755	725	7.2	7.5
10 1/2x5x6 1/2	267	127	1000	890	885	805	770	8.0	-
12x4x8	305	102	835	745	740	670	645	7.6	-
12x4 1/2x8	305	114	970	865	860	780	745	8.8	-
12x5 1/2x8	305	140	1240	1100	1095	995	950	10.8	-
13 1/2x5 1/2x8	343	140	1400	1245	1235	1125	1075	14.1	12.6
14x4 1/2x8	356	114	1085	965	960	870	835	11.6	11.2
14x5x10	356	127	1240	1100	1095	995	955	11.9	-
15x4x11 1/4	381	102	985	875	870	790	755	10.5	-
15x5x11 1/4	381	127	1290	1150	1145	1040	995	12.8	-
16x5x10 1/2	406	127	1400	1245	1240	1125	1075	15.2	14.7
16x6x10 1/2	406	152	1775	1580	1570	1430	1365	18.3	17.7
16x7x10 1/2	406	178	2155	1915	1905	1730	1655	21.4	-
16 1/4x5x11 1/4	413	127	1415	1260	1250	1135	1090	15.1	14.5
16 1/4x6x11 1/4	413	152	1780	1585	1575	1430	1370	18.1	17.4
16 1/4x7x11 1/4	413	178	2150	1915	1900	1730	1655	21.4	20.6
17x5x12 1/8	432	127	1460	1300	1295	1175	1125	15.7	-
18x5x12 1/8	457	127	1525	1355	1350	1225	1175	18.2	17.5
18x6x12 1/8	457	152	1945	1735	1720	1565	1500	22.1	21.0
18x7x12 1/8	457	178	2370	2110	2095	1905	1820	25.2	24.9
18x8x12 1/8	457	203	2790	2485	2470	2245	2145	29.0	28.3
18x9x12 1/8	457	229	3215	2860	2840	2580	2470	-	35.0
21x6x15	533	152	2185	1945	1935	1760	1680	26.6	26.1
21x7x15	533	178	2665	2370	2355	2140	2050	31.1	30.0
21x8x15	533	203	3140	2795	2780	2525	2415	35.7	34.0
21x9x15	533	229	3620	3220	3200	2910	2785	40.3	-
20x5x16	508	127	1620	1440	1430	1300	1245	18.5	-
20x8x16	508	203	2795	2490	2475	2250	2150	29.4	28.5
22x8x16	559	203	3255	2895	2880	2615	2500	37.7	36.0
22x9x16	559	229	3745	3335	3315	3010	2880	46.6	44.1
22x12x16	559	305	5230	4655	4625	4205	4025	63.2	62.0
28x12x22	711	305	6265	5575	5545	5035	4820	83.5	-