



Earthmover Radial Tires

PREMIUM CONSTRUCTION PNEUMATIC


EMR 1030

The Trelleborg EMR range is designed to enhance productivity in critical construction applications, delivering both enhanced damage protection and durability while the multi surface tread design delivers control and perfect grip when it's needed the most, whether on sand, rock, gravel or soil.


The strong radial carcass and state of the art compound assure long life, while providing equal load distribution for a comfortable ride, maintaining low fuel consumption.

Designed for articulated dumper, loader and grader applications, the EMR 1030 range is ideal for every kind of haulage and loading operations and extremely versatile in industries such as infrastructure and building construction, landscaping, open pits and quarries.

Applications

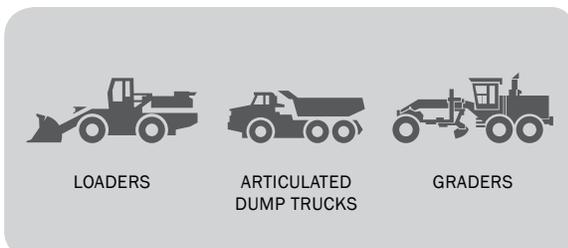

Tire Features

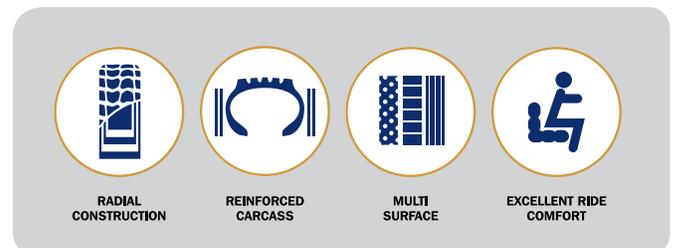

PREMIUM CONSTRUCTION PNEUMATIC
EMR 1030

LOADER/TRANSPORT SERVICE

Tire Size	Tread Pattern TRA	Rim Size (Permitted)	Tread Depth (32/nds)	Service Description LI/SS Loader/Transport	Tire Load Capacity (lbs) at 6 (mph)	Tire Pressure (PSI)	Tire Load Capacity (lbs) at 31 (mph)	Tire Pressure (PSI)
17.5 R 25	L3/E3	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	35	* 176 A2/157 B	15,565	65	9,096	51
20.5 R 25	L3/E3	17.00/2.0-25 (17.00/1.7-25)	45	** 193 A2/177 B	25,358	83	16,097	65
23.5 R 25	L3/E3	19.50/2.5-25	48	** 201 A2/185 B	31,973	83	20,396	65
26.5 R 25	L3/E3	22.00/3.0-25	52	** 209 A2/193 B	40,785	83	25,358	65
750/65 R 25	L3/E3	24.00/3.0-25	55	** 209 A2/190 B	40,785	91	23,373	62
29.5 R 25	L3/E3	25.00/3.5-25	54	** 216 A2/200 B	49,383	83	30,870	65

GRADER SERVICE

Tire Size	Tread Pattern TRA	Rim Size (Permitted)	Tread Depth (32/nds)	Service Description LI/SS Grader	Tire Load Capacity (lbs) at 25 (mph)	Tire Pressure (PSI)
17.5 R 25	G3+	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	35	* 153 A8	8,046	43
20.5 R 25	G3+	17.00/2.0-25 (17.00/1.7-25)	45	* 161 A8	10,196	43
23.5 R 25	G3+	19.50/2.5-25	48	* 170 A8	13,227	43
26.5 R 25	G3+	22.00/3.0-25	52	* 178 A8	16,534	43
750/65 R 25	G3+	24.00/3.0-25	55	* 178 A8	16,534	47

+ Not marked as grader on the mold **/** - Index of tire strength

Main Benefits

- Excellent self-cleaning
- Low vibration
- Robust carcass
- Cut resistant compound

